


Part Number : ALC10D1019DF  
 Customer : TREMIVER / NAIM  
 Customer p/n :

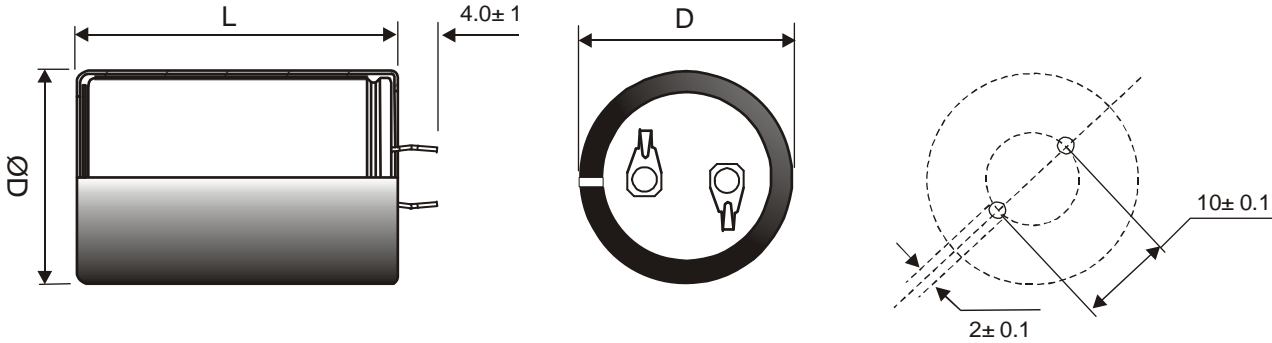

Diameter (mm) 35 -0/+1  
 Length (L or L2) (mm) 50 +/-2  
 Terminals 2 pin short snap-in  
 Other Dimensions

Capacitance: 10000 uF  
 Lower Cap Tolerance: 20 %  
 Upper Cap Tolerance: 20 %  
 Working Voltage: 63 V DC  
 Surge Test Voltage: 72.5 V DC

ESR 64 m'Ohms MAX @ 100 HZ,20°C  
 IMPEDANCE 51 m'Ohms MAX @ 10 KHZ,20°C

DC LEAKAGE 3.78 mA max @ Test Volts  
 Test Voltage 63.0V DC

Rated ripple current 4.85 A rms at 100 Hz and 85 °C  
 Temperature range -40 °C to 85 °C

KEMET  
 CT02  
 ALC10D1019DF  
 DATE CODE BATCH NO.

(With negative line)

Approved \_\_\_\_\_ Date \_\_\_\_\_

Form : FM003.DES Iss : 3 Date :30/06/1